由 Autodesk 教育版产品制作

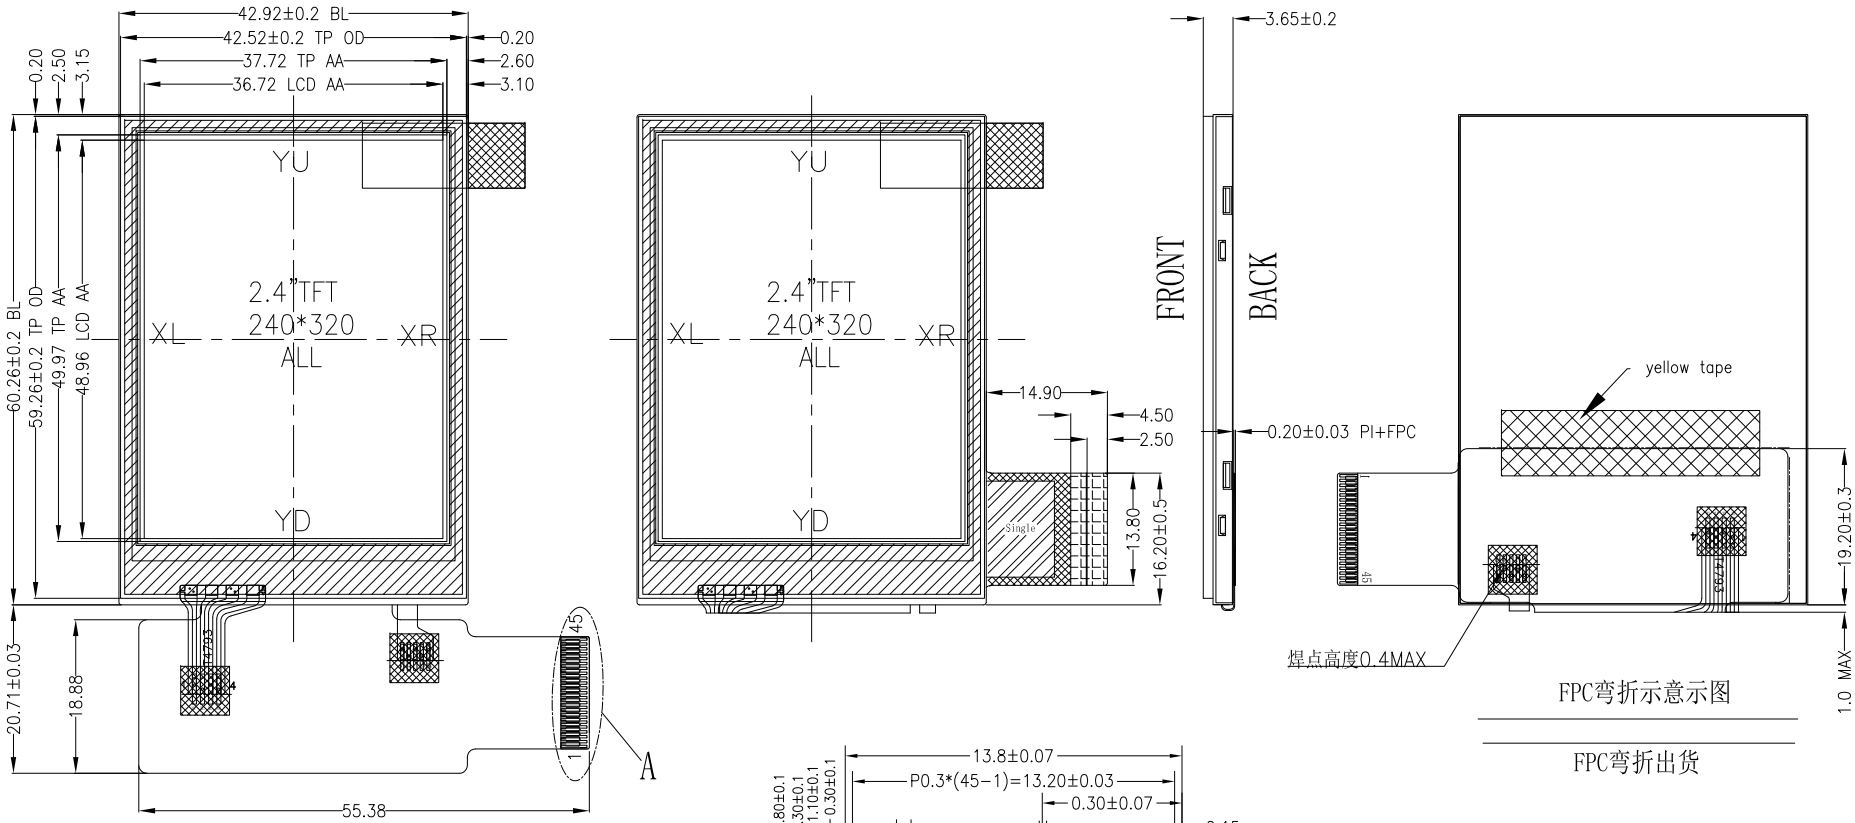

FPC弯折示意示图

FPC弯折出货

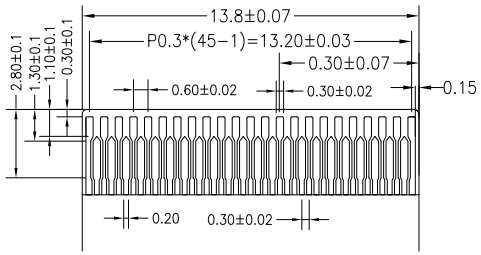

Detail A
3:1

FH23-45S-0.3SHW

NO.	Pin Name
1	VCI
2	IOVCC
3	IM0
4	IM1
5	IM2
6	IM3
7	RESET
8	VSYNC
9	HSYNC
10	DOTCLK
11	ENABLE
12	DB17
13	DB16
14	DB15
15	DB14
16	DB13
17	DB12
18	DB11
19	DB10
20	DB9
21	DB8
22	DB7
23	DB6
24	DB5
25	DB4
26	DB3
27	DB2
28	DB1
29	DB0
30	SDO
31	SDI
32	RD
33	WR(SPI-SCL)
34	RS
35	CS
36	GND
37	LEDA
38	LEDK1
39	LEDK2
40	NC
41	XR
42	YD
43	XL
44	YU
45	NC

NOTE: MCU interface SET for IM PINS.

IM3	IM2	IM1	IM0	Interface type	DB Pin in use
0	0	1	1	DBI Tyb_ 8-bit interface	DB10-DB17
0	0	1	0	DBI Tyb_ 16-bit interface	DB1-DB8, DB10-DB17
1	0	1	1	DBI Tyb_ 9-bit interface	DB9-DB17
1	0	1	0	DBI Tyb_ 18-bit interface	DB0-DB17
0	1	1	0	3-Wire 9 BIT data serial interface. (TYP used)	SDA SCL CS
0	1	1	1	4-Wire 8 BIT data serial interface	SDA SCL CS RS

NOTE:
1. If not use PINS fix to the GND , IOVCC or NC.
2. If use RGB mode must select serial interface

NOTES:

1. DISPLAY TYPE: 2.4", TFT-LCD, 65/262K COLORS
2. DISPLAY MODE: T/N NORMALLY BLACK
3. VIEWING DIRECTION: SUPER WIDE VIEWING ANGL
4. DRIVER IC: ILI9325C (COG)
5. VCI: 3.3V, IOVCC: 1.8V/3.3V
6. OPERATING TEMP: -20°C TO 70°C
   STORAGE TEMP: -30°C TO 80°C
7. BACK LIGHT: LED WHITE, 4 LED, 40mA, 6.4±0.3V
8. RoHS COMPLIANT.



BLU CIRCUIT DIAGRAM

ReV.	Revision content description	Date
A	FIRST	2016/08/02

由 Autodesk 教育版产品制作

深圳市柯达科电子科技有限公司
SHENZHEN STARTEK ELECTRONICS CO.,LTD

TOLERANCE(公差)		DRAWING NAME	KD024QVRMA018-TP
		PARTS NO.	99024035B
TOLERANCE UNLESS	X.X±0.3	Drawn	Unit
OTHERWISE SPECIFIED	X.XX±0.2	Checked	mm
Scale 1:1		Approve	Page 1/1

由 Autodesk 教育版产品制作